



MATERIALS

Red Heart® Super Saver™ (7 oz/198 g; 364 yds/333 m)

Main Color (MC) Pretty 'n Pink (0722) **4 balls**

Contrast A Minty (0520) **1 ball**

Size U.S. G/6 [4 mm] Susan Bates® Silvalume crochet hook **or size needed to obtain gauge.** Susan Bates® yarn needle. Safety pins. Susan Bates® locking stitch markers. 3" [7.5 cm] thick foam slab 24" [61 cm] square. 5" [12.5 cm] thick foam slab 13" [33 cm] long by 24" [61 cm] wide. See Foam Cutting Diagrams on page 3 for further details. Spray adhesive/glue (ensure manufacturers' instructions rate product appropriate for use with foam.) Serrated knife to cut foam. Polyfill stuffing for Bolster Pillow. Optional catnip.



CROCHET | SKILL LEVEL: **INTERMEDIATE**

ABBREVIATIONS

Approx = Approximately

Beg = Beginning

Ch = Chain(s)

Cont = Continue(ity)

Dec = Decrease

Hdc = Half double crochet

Hdc2tog = (Yoh and draw up a loop in next stitch) twice. Yoh and draw through all loops on hook

Lnkdc = Insert hook down through lower horizontal bar in center of previous lnktr, yoh and draw up a loop. Insert hook in next stitch (through top loops in usual manner), yoh and draw up a loop. Yoh and draw through first 2 loops on hook. Yoh and draw through last 2 loops on hook – Linked Dc made. **See photos on page 7**

Lnkdtr = Insert hook down through horizontal bar in center of previous lnkhdc, yoh and draw up a loop. Insert hook down through horizontal bar in right-most hdc one row below and draw up a loop. Insert hook down through horizontal bar in right-most hdc two rows below and draw up a loop. Draw up a loop in next unworked stitch three rows below. (Yoh and draw through 2 loops on hook) 4 times – Linked Double Treble made. **See photos on page 7**

Lnkhdc = Draw up a loop in center loop from previous stitch. Draw up a loop in next hdc (through top loops in usual manner). Yoh and draw through all loops on hook – Linked Hdc made. **See photos on page 7**

Lnkhdc2tog = Draw up a loop in centre loop from previous st. Draw up a loop in next hdc (through top loops in usual manner). Yoh and draw up a loop in next hdc. Yoh and draw through all loops on hook. – Linked Hdc2tog made.

Lnktr = Insert hook down through second lowest horizontal bar in center of previous lnkdtr, yoh and draw up a loop. Insert hook down through lowest horizontal bar in center of previous lnkdtr, yoh and draw up a loop. Draw up a loop in next stitch. (Yoh and draw through first 2 loops on hook) 3 times – Linked Tr made. **See photos on page 7**

continued on page 2.

ABBREVIATIONS (continued)

Pat = Pattern
PM = Place marker
Rem = Remain(ing)
Rep = Repeat
Rnd(s) = Round(s)
RS = Right side
Sc = Single crochet
Sl st = Slip stitch
Sp(s) = Space(s)
St(s) = Stitch(es)
WS = Wrong side
Yoh = Yarn over hook

MEASUREMENTS

Approx 27" [68.5 cm] wide x 13" [33 cm] deep x 13½" [34.5 cm] tall.

GAUGE

16 hdc and 9 rows = 4" [10 cm].

INSTRUCTIONS

Note: Ch 2 at beg of row **does not** count as st.

BASE

See diagram on page 9.
 With MC, ch 66.

1st row: (RS). 1 hdc in 3rd ch from hook. 1 hdc in each ch to end of chain. Turn. 64 hdc

2nd row: Ch 2. 1 hdc in each hdc to end of row. Turn.

Rep 2nd row until work from beg measures 24" [61 cm], ending on a WS row.

Next row: (RS). Ch 2. 1 hdc in each st to last 12 hdc. **Turn**, leaving rem sts unworked.

Cont on rem 52 hdc.

Next row: Ch 2. 1 hdc in each hdc to end of row. 52 hdc. Turn.

Rep last row until work from beg measures 27" [68.5 cm]. Fasten off.

BACK PANEL

See diagram on page 9.
 With MC, ch 98.

1st row: (WS). 1 hdc in 3rd ch from hook. 1 Inkhdc in each ch to end of chain. Turn. 96 sts.

2nd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn. 96 sts.

Rep 2nd row until work from beg measures 7" [18 cm], ending on a RS row.

Proceed with short-row shaping as follows:

See diagram on page 8.

1st row: (WS). Ch 2. 1 hdc in first st. 1 Inkhdc in each st to last 20 sts. **Turn**, leaving rem sts unworked. 76 sts.

2nd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.

3rd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to last 4 sts. **Turn**, leaving rem sts unworked. 72 sts.

Rep last 2 rows 10 times more, ending on a 2nd row. 32 sts.

Resolving short rows

See diagram on page 8.

Next row: (WS). Ch 2. 1 hdc in first st. 1 Inkhdc in each of next 31 sts. (Working into next unworked st 3 rows below, 1 Inkdtr in next st. 1 Inktr in next st. 1 Inkdtr in next st. 1 Inkhdc in next st) 11 times. 1 Inkhdc in each st to end of row. Fasten off. 96 sts.

SEAT

See diagram on page 9.
 With MC, ch 98.

1st row: (RS). 1 hdc in 3rd ch from hook. 1 Inkhdc in each ch to end of chain. Turn. 96 sts.

2nd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.

Rep 2nd row until work from beg measures 5" [12.5 cm], ending on a WS row.

Next row: (RS). Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Ch 22. Turn, being careful not to twist chain.

Next row: 1 hdc in 2nd ch from hook. 1 Inkhdc in each of next 19 ch. 1 Inkhdc in each st to end of row. Turn. 116 sts. PM on last st. **Next row:** Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.

Rep last row until work from marked row measures 13" [33 cm], ending on a WS row.

Dec row: (RS). Ch 2. 1 hdc in first st. 1 Inkhdc in each st to last 20 sts. **Turn**, leaving rem sts unworked. Cont on rem 96 sts.

Next row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.

Rep last row until work from dec row measures 2" [5 cm], ending after a WS row.

Proceed with short-row shaping as follows:

1st row: (RS). Ch 2. 1 hdc in first st. 1 Inkhdc in each st to last 20 sts. Turn, leaving rem sts unworked. Cont on rem 76 sts.

2nd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.

3rd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to last 4 sts. Turn, leaving rem sts unworked. 72 sts.

Rep last 2 rows 10 times more, ending on a 2nd row. 32 sts.

Resolving short rows: Next row: (RS). Ch 2. 1 hdc in first st. 1 Inkhdc in each of next 31 sts. (Working into next unworked st 3 rows below, 1 Inkdtr in next st. 1 Inktr in next st. 1 Inkdc in next st. 1 Inkhdc in next st) 11 times. 1 Inkhdc in each st to end of row. Fasten off. 96 sts.

ARMREST CAPS (make 2)

With MC, ch 14.

1st row: (RS). 1 hdc in 3rd ch from hook. 1 Inkhdc in each ch to end of chain. Turn. 12 sts.

2nd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.

Rep 2nd row until work from beg measures 8" [20.5 cm], ending on a WS row.

Next 2 rows: Ch 1. 1 hdc in first st. Lnhdc2tog. 1 Inkhdc in each st to last 3 sts. Lnhdc2tog. 1 Inkhdc in last st. Turn. 8 sts at end of 2nd row. Fasten off.

ARMREST COVER

With MC, ch 54.

1st row: (RS). 1 hdc in 3rd ch from hook. 1 Inkhdc in each ch to end of chain. Turn. 52 sts.

2nd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.


Rep 2nd row until work from beg measures 16" [40.5 cm] ending on a WS row. Fasten off.

Cut and Assemble Foam

Place Back Panel on 3" [7.5 cm] thick foam as shown in Foam Cutting Diagram I. Trace around perimeter. Cut foam working on the **inside** of each line.


Cut a rectangle measuring 9" x 13" [23 x 33 cm] using 3" [7.5 cm] thick foam for Armrest.

Using a serrated knife, bevel top corners of Armrest as shown in diagram.




Cut a rectangle measuring 24 x 13" [61 x 33 cm] using 5" [12.5 cm] foam for Seat.

Foam Cutting Diagram I
Back of Chaise and Armrest

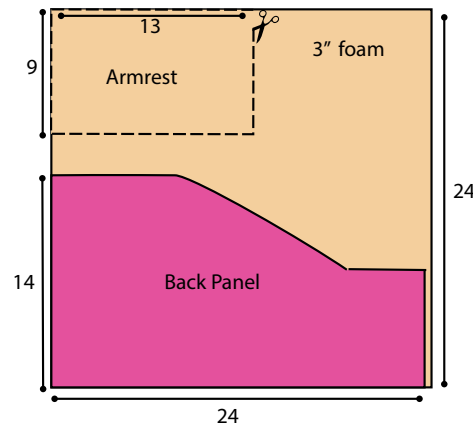

Foam Cutting Diagram II
Seat

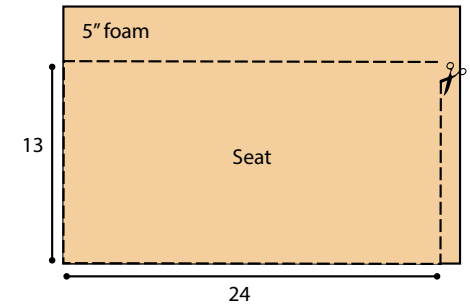

Using a spray adhesive, attach Back of Chaise foam pieces together. As shown in Foam Assembly Diagram I on page 10.

Attach Armrest to Base of Chaise using spray adhesive. **Note that Armrest is not attached to Back of Chaise.**

SEAMING CHAISE COVER

See Flat Seaming Diagrams on page 11.

Miter Left Front Corner

Match points marked A and B as indicated in Flat Seaming Diagrams. With RS facing and using a whipstitch, seam tog from A/B to C as shown in Finished Seaming Diagrams.

Align Armrest Cover with Seat as marked by C and D in Flat Seaming Diagrams. With RS facing and using a whipstitch, seam tog from K to F as shown in Flat Seaming Diagrams.

PM 5½" [14 cm] in from Seat on each side of Armrest Cover as shown in Flat Seaming Diagrams for points K and F.

PM at center of both Front and Back Armrest Caps for U and Q as shown in Flat Seaming Diagram.

PM 5" [12.5 cm] up from base of Front and Back Armrest caps, noting that marker is placed on left side of Front Armrest Cap and on the right side of Back Armrest Cap as shown in Flat Seaming Diagrams.

Joining Front Armrest Cap

See Finished Seaming Diagrams on page 11.

With RS facing, match the following pairs and tack tog using safety pins, locking stitch markers, or waste yarn as follows: Match E to W, X to F, U to G, and H to V. Using a whipstitch, seam tog from E/W to H/V.

Joining Back Armrest Cap

See diagrams on page 12.
With RS facing, match the following pairs and tack tog using safety pins, locking stitch markers, or waste yarn as follows: match T to I, Q to J, and K to R. Using a whipstitch, seam tog from T/I to K/R.

Make and Join Gusset

With MC, ch 14.
1st row: 1 hdc in 3rd ch from hook. 1 Inkhdc in each ch to end of chain. Turn. 12 sts.
2nd row: Ch 2. 1 hdc in first st. 1 Inkhdc in each st to end of row. Turn.
Rep last row until Gusset measures length to fit along back of Seat.

With RS facing, tack Gusset to Seat at following points using safety pins, locking stitch markers, or waste yarn as follows: S, L, M, N, O and A.

Seam tog using whipstitch, re-placing markers to be visible on RS of work when finished.

Join Back Panel

With RS facing, align Back Panel to Gusset tack tog using safety pins, locking stitch markers, or waste yarn, ensuring that the points indicated along Back Panel correspond to markers along Seat. Seam tog using whipstitch from Y to X, X to A3, A3 to A2.

FRINGE


With A, ch 161.
****1st row:** (WS). 1 sc in 2nd ch from hook and each ch to end of chain. Turn. 160 sc.
2nd row: Ch 1. *Sl st in next sc. Draw up a loop 9" [23 cm] long. Twist loop 25 times. Sl st in same st, allowing twisted loop to coil around itself twice. Rep from * to end of row. Fasten off.

Sew Fringe around base of Chaise as shown, with top of Fringe positioned approx 3½" [9 cm] above Base, and starting at F/X as indicated in Finished Seaming Diagrams and ending at A11.

Twisted Cord (make 2).

Cut 6 lengths of A 62" [157.5 cm] long. With all strands tog, hold one end and with someone holding other end, twist strands to the right until they begin to curl. Fold the 2 ends tog and tie in a knot so they will not unravel. The strands will now twist themselves tog. Adjust length of each cord to fit around Front Armrest Cap from W/E to G/U to V/H, joining ends in corners.

Note: Cord ends will be concealed when Base is attached.

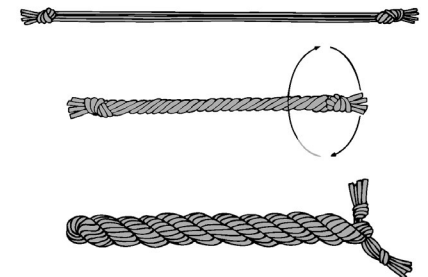

Joining Base

Place Chaise cover over foam form and adjust so Cover is fully filled out.

With WS facing, match following pairs and tack tog using safety pins, locking stitch markers, or waste yarn as follows: Match A6 to B/D, A5 to Z, A10 to A1, A9 to S, A8 to T/I, and A7 to H/V.

Join MC with sl st to any st at center back of Chaise Cover. *Working through both thicknesses of Chaise Cover and Back Panel*, work 1 sc in each st around, being sure to work around Twisted Cord to seal it into seam. Join with sl st to first sc. Fasten off.

BOLSTER PILLOW Stripe Pat

With A, work 2 rows.

With B, work 2 rows.

These 4 rows form Stripe Pat.

With A, ch 46.

1st row: 1 sc in 2nd ch from hook. *Ch 1. Skip next ch. 1 sc in next ch. Rep from * to end of chain. Turn. 45 sts (sc and ch-1).

2nd row: Ch 1. 1 sc in first sc. 1 sc in next ch-1 sp. *Ch 1. Skip next sc. 1 sc in next ch-1 sp. Rep from * to last sc. 1 sc in last sc. Turn.

First 2 rows of Stripe Pat are now complete.

3rd row: Ch 1. 1 sc in first sc. *Ch 1. Skip next sc. 1 sc in next ch-1 sp. Rep from * to last 2 sc. Ch 1. Skip next sc. 1 sc in last sc. Turn.

Keeping cont of Stripe Pat, rep 2nd and 3rd rows for Moss St Pat, until work from beg measures 12½" [32 cm].

Fasten off.

Sew first and last rows tog using whipstitch to form tube.

Bolster Cap Motif (make 2)

See diagram on page 6.

Note: Join all rnds with sl st to first st (sc of hdc).

With A, ch 8. Join with sl st to first ch to form a ring.

1st rnd: Ch 1. 18 sc in ring. Join. 18 sc.

2nd rnd: Ch 1. 1 sc in same sp as sl st. *Ch 3. Skip next 2 sc. 1 sc in next sc. Rep from * to last 2 sc. Ch 3. Skip last 2 sc. Join. Fasten off.

3rd rnd: Join MC with sl st to first ch-3 sp. (1 sc. Ch 3. 5 dc. Ch 3. 1 sc) all in same ch-3 sp. (1 sc. Ch 3. 5 dc. Ch 3.1 sc) in next ch-3 sp. Rep from * around. Join.

4th rnd: Ch 1. 1 sc in same sp as sl st. *Working behind sts in previous row, ch 5. 1 sc between next 2 sc. Rep from * around, ending with ch 5. Join.

5th rnd: Sl st to next ch-5 sp. Ch 1. (1 sc. Ch 3. 7 dc. Ch 3. 1 sc) all in same ch-5 sp. (1 sc. Ch 3. 7 dc. Ch 3. 1 sc) in next ch-5 sp. Rep from * around. Join. Fasten off.

Bolster Cap Liner (make 2)

With A, ch 3.

1st rnd: 10 hdc in 2nd ch from hook. Join. 10 hdc.

2nd rnd: Ch 2. 2 hdc in each hdc around. Join. 20 hdc.

3rd rnd: Ch 2. *2 hdc in next hdc. 1 hdc in next hdc. Rep from * around. Join. 30 hdc.

Place Bolster Cap Motif over Bolster Cap Liner, aligning any sps between sc sts in Motif over first hdc of last rnd.

Join Bolster Cap Motif with Cap Liner: 1st rnd:


Ch 2. *Working in next sp between 2 sc of previous rnd of Motif and through corresponding hdc of previous rnd of Liner, 1 hdc. 1 hdc in each of next 3 hdc of Liner. 2 hdc in next hdc of Liner. Rep from * around. Join.

2nd rnd: Ch 1. 1 sc in each st around. Join. Fasten off.

Align Bolster Cap around circumference at end of Bolster with WS facing. *Working through both thicknesses*, join A with sl st.

Next rnd: *Working from left to right instead of right to left as usual*, work 1 reverse sc in each st around. Join. Fasten off.

Stuff with polyfill (and catnip if desired!). Rep joining rnd for opposite end of Bolster.

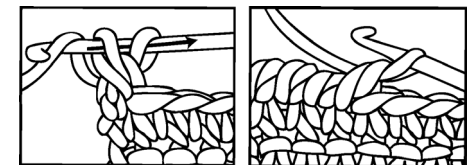


REVERSE SC



- STITCH KEY
- = chain (ch)
 - = slip stitch (sl st)
 - + = single crochet (sc)
 - T = joining rnd hdc (hdc)
 - ┆ = half double crochet (hdc)
 - ┆ = double crochet (dc)

BOLSTER CAP MOTIF

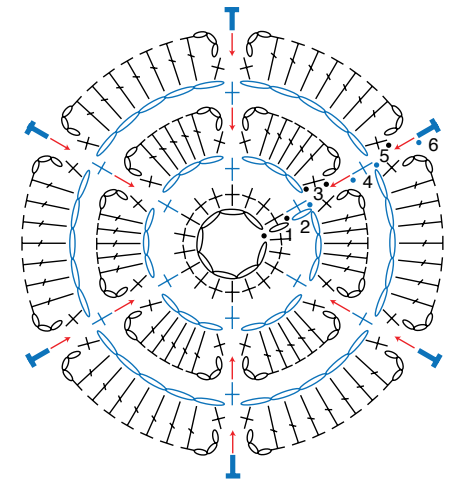

STITCH DIAGRAMS

First st - Inkdtr



Insert hook down through horizontal bar in center of previous Inkhdc.



Yoh and pull up a loop.



Insert hook down through horizontal bar in rightmost hdc one row below. Yoh and pull up a loop.



Insert hook down through horizontal bar in rightmost hdc two rows below



Yoh and pull up a loop.



Draw up a loop in next unworked st three rows below.



(Yoh and draw through 2 loops on hook) 4 times – Linked Double Treble made.

Second st - Inktr



Insert hook down through second lowest horizontal bar in center of previous Inkdtr



Yoh and pull up a loop.



Insert hook down through lowest horizontal bar in center of previous Inkdtr. Yoh and draw up a loop.




Draw up a loop in next st.



(Yoh and draw through first two loops on hook) 3 times – Linked Tr made.



Insert hook down through lower horizontal bar in center of previous Inktr, yoh and pull up a loop.



Yoh and pull up a loop in next hdc.



Yoh and pull through first 2 loops on hook. Yoh and pull through last 2 loops on hook – Linked Dc made.

Fourth st - Inkhdc




Draw up a loop in center loop from previous st.




Draw up a loop in next hdc (through top loops in usual manner). Yoh and draw through all loops on hook. – Linked Hdc made.

STITCH CHARTS

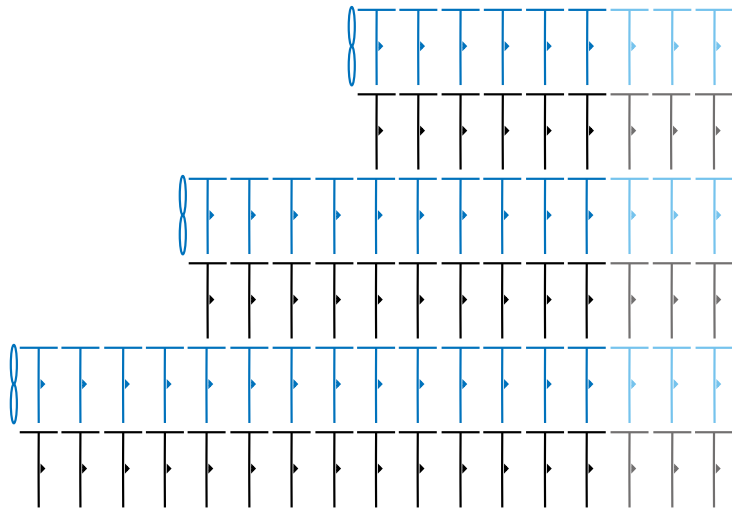



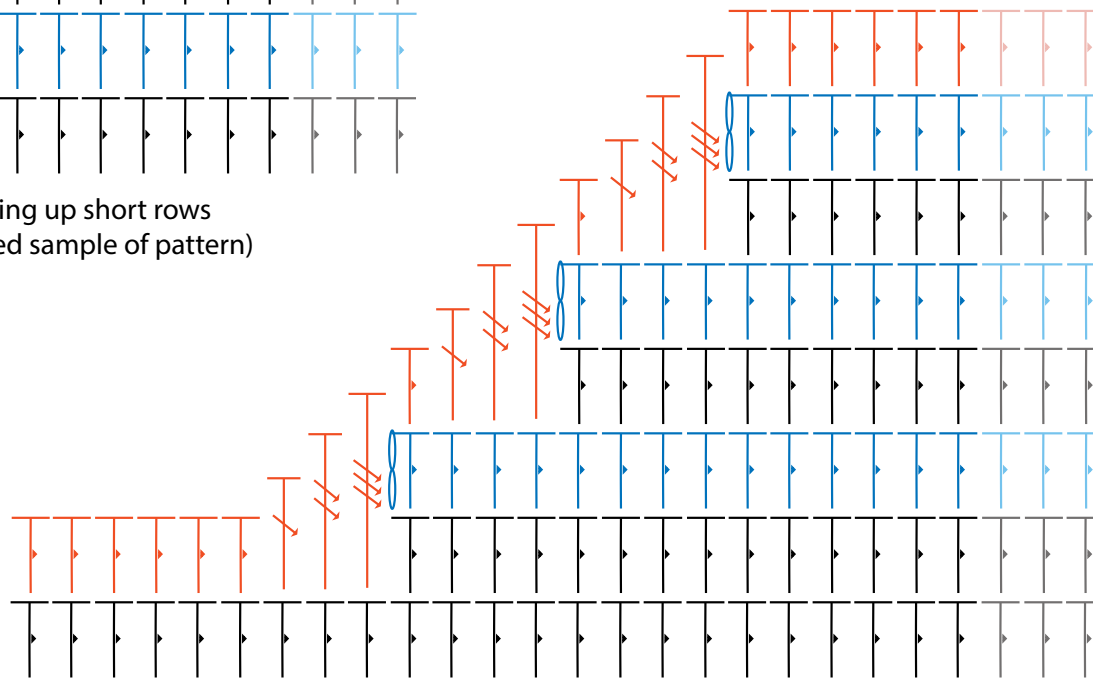



Setting up short rows
(Reduced sample of pattern)




Resolving short rows
(Reduced sample of pattern)



Key

-  = Chain
-  = Lnhdc
-  = Lnkdc
-  = Lnktr
-  = Lnkptr
-  = Lnkptr


SCHEMATICS

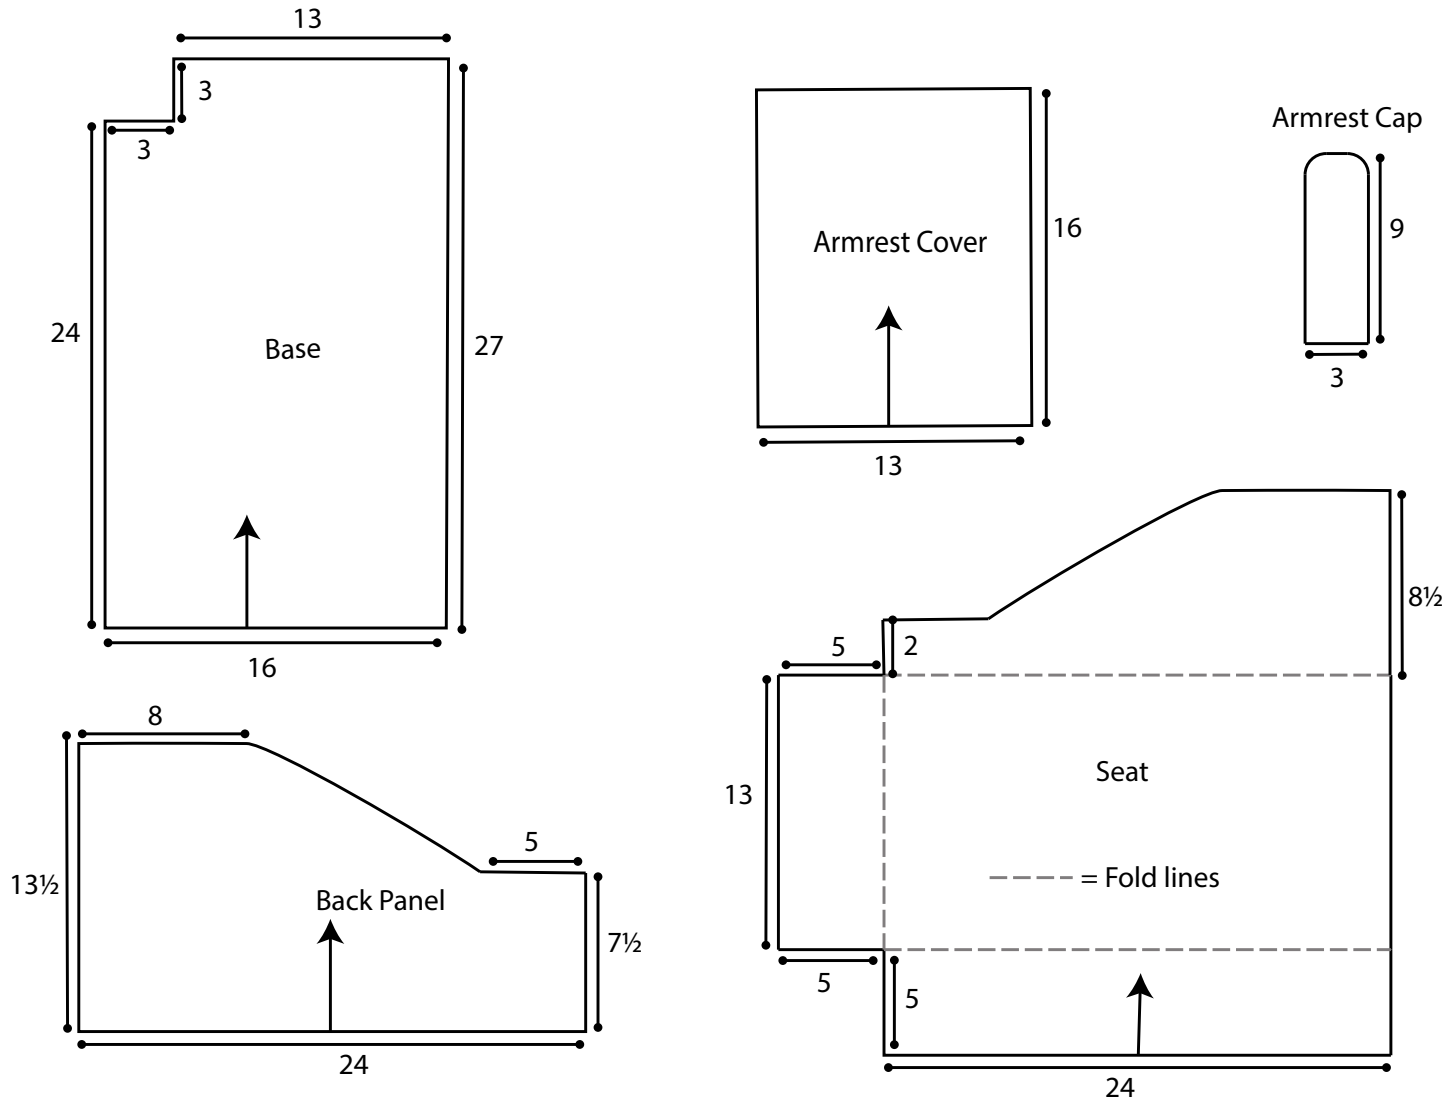



FOAM ASSEMBLY DIAGRAM

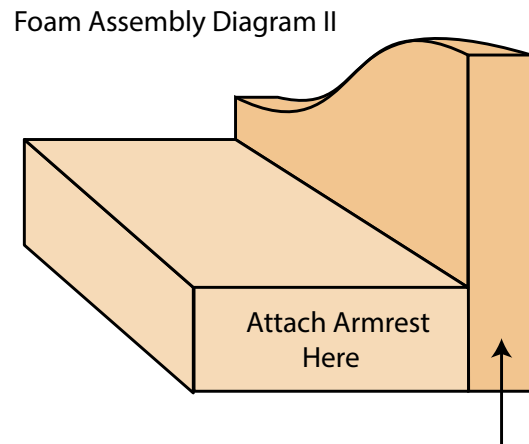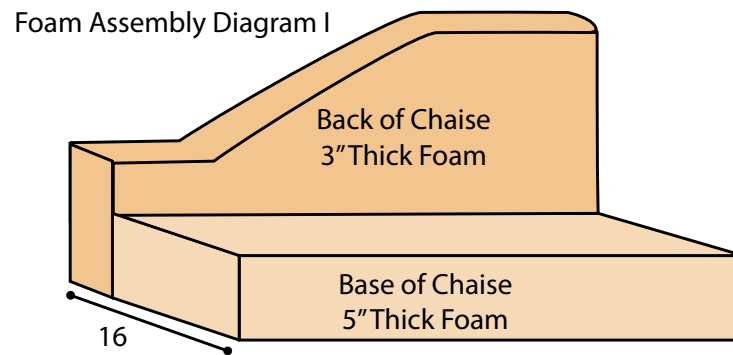




Do not attach
Armrest
to Back of Chaise

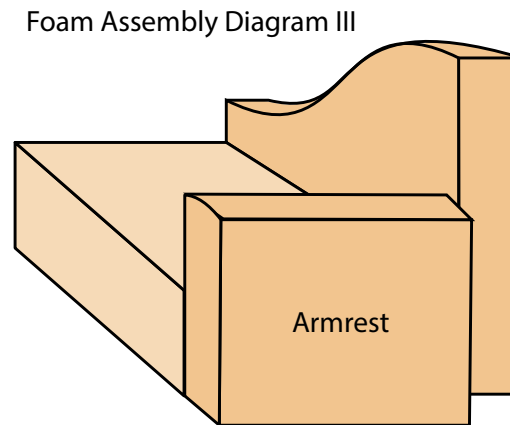

FLAT SEAMING DIAGRAMS

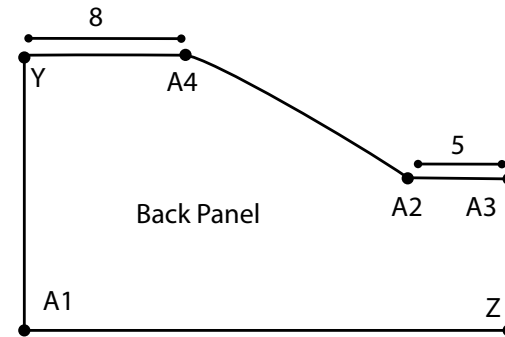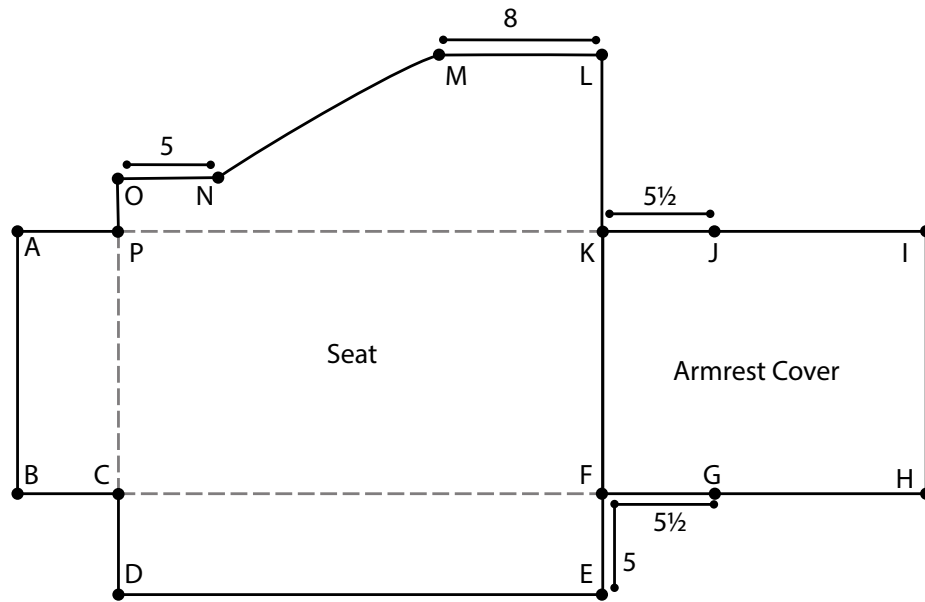

Back Armrest Cap

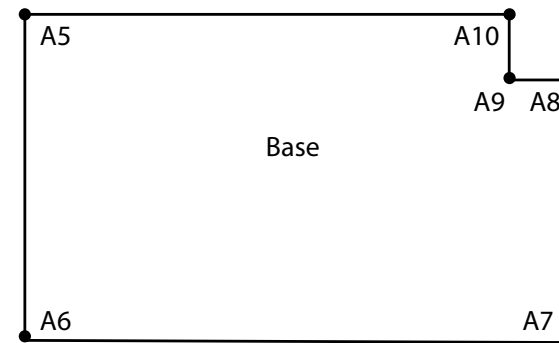

Front Armrest Cap

FINISHED SEAMING DIAGRAMS

